



APPROVAL SHEET

| Approval Specification | Customer's Approval Certificate |
|--|---|
| <p>TO:</p> <p>Part No.:</p> <p>Customer's Part No.:</p> | <p>Please return this copy as a certification of your approval</p> <p>Checked & Approved by:</p> <p>Date:</p> |

BEIJING ZHONGXUN SIFANG SCIENCE & TECHNOLOGY CO.,LTD.

Tel: +86-010-58937383
 Fax: +86-010-58937263
 E-mail: bjzxsf@bjzxsf.net
 Website: <http://www.bjzxsf.net>
 Add: No 201, Block A. Building 3. Yongjie Beilu
 Yongfeng high-tech industrial base
 Haidian District Beijing city



| | | |
|----------|---|----------|
| Part No. | : | SF0600 |
| Pages | : | 6 |
| Date | : | 2015/7/6 |
| Revision | : | 1.0 |

| | |
|---------------------|----|
| Prepared by: | 梁浩 |
| Checked by: | |
| Approved by: | |

Application


- Low-loss SAW component
- Low amplitude ripple
- Sharp rejections at both out-bands
- Passband 2.2 MHz

Features

- Ceramic Package for **Surface Mounted Technology (SMT)**
- **RoHS** compatible
- Package size 19.00x6.50x1.75mm³
- Package Code SMD19

- **Electrostatic Sensitive Device(ESD)**

Package Dimensions (Unit: mm)

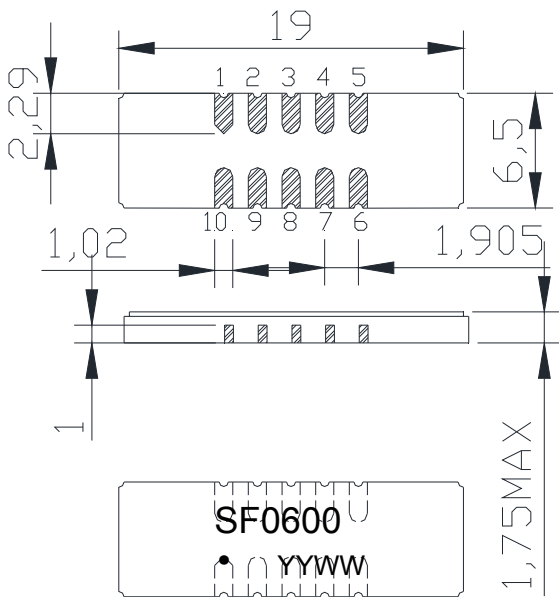


Pin Configuration

| Pin No. | Description |
|-----------------|-------------|
| 10 | Input |
| 5 | Output |
| 1,2,3,4,6,7,8,9 | Ground |

Marking Description

| | |
|-------------|-----------------------|
| S | Trademark |
| F | SAW Filter |
| 0600 | Part Number |
| ● | Pin 1 |
| YYWW | Year Code & Week Code |

Test Circuit(Bottom View)

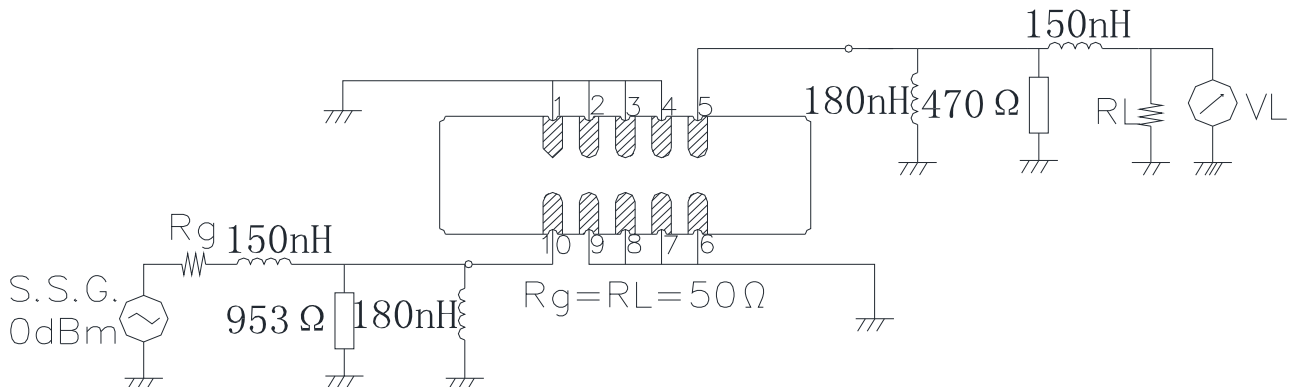

*Fig: If the products produced in 06th week of 2012, The year code & week code is 1206.

Performance**Maximum Rating**

| Item | | Value | Unit |
|-----------------------|------------------|------------|------|
| DC Voltage | V _{DC} | 3 | V |
| Operation Temperature | T | -40 ~ +85 | °C |
| Storage Temperature | T _{stg} | -55 ~ +125 | °C |
| RF Power Dissipation | P | 10 | dBm |

Electronic Characteristics

Test Temperature: 25°C ± 2°C


Terminating source impedance: 50Ω

Terminating load impedance: 50Ω


| Item | | Minimum | Typical | Maximum | Unit |
|---|-------------------|---------|---------|---------|------|
| Center Frequency | f _c | | 57.38 | | MHz |
| Insertion Loss(Fc) | IL | | 14.7 | 16.0 | dB |
| 1 dB Bandwidth(Relative to Fc) | BW _{1dB} | 2.20 | 2.30 | 2.40 | MHz |
| Absolute Attenuation(With a base of Fc) | α | | | | |
| | 55.48MHz | 46.5 | 63.3 | | dB |
| | 59.28MHz | 46.5 | 47.4 | | dB |
| | 47.38-55.48MHz | 45.0 | 47.0 | | dB |
| | 59.28-67.38MHz | 45.0 | 48.0 | | dB |
| | 85.00-700.00MHz | 25.0 | 39.0 | | dB |
| Phase Linearity | 56.28-58.48MHz | | 8.0 | 10.0 | deg |
| Input VSWR | 57.38MHz | | 2.1:1 | 2.5:1 | / |
| Output VSWR | 57.38MHz | | 1.6:1 | 2.0:1 | / |

Frequency Characteristics


Frequency Response

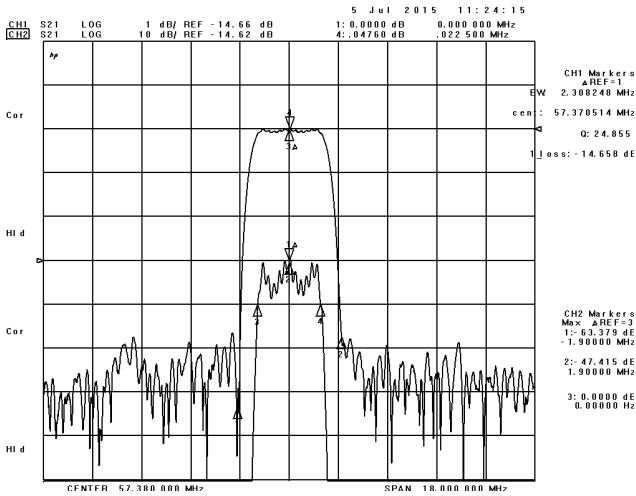


Frequency Response (wideband)

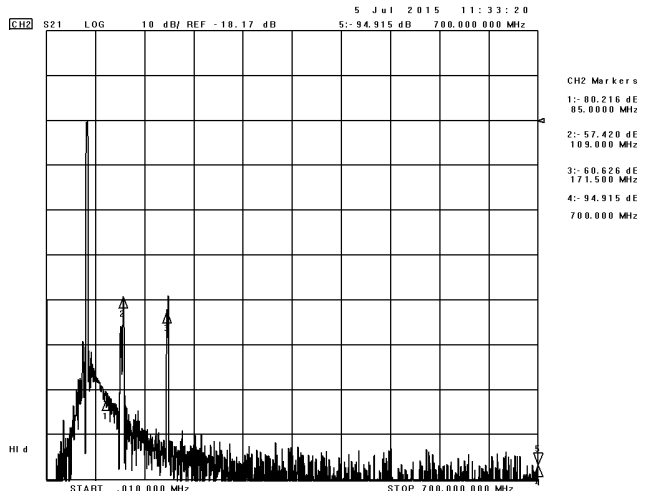


Delay Ripple & S11 VSWR

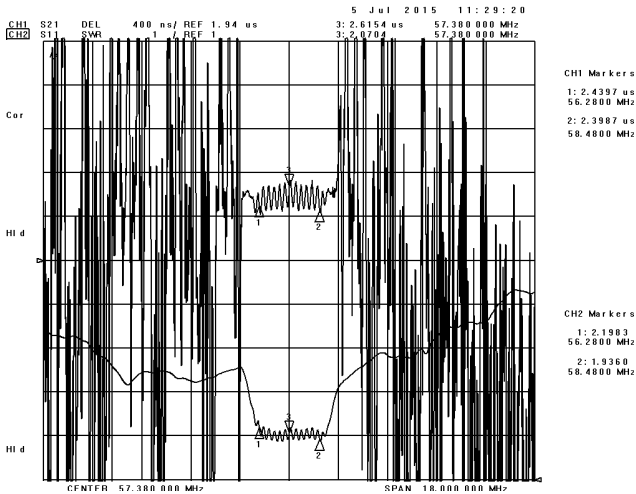


Phase Linearity & S22 VSWR

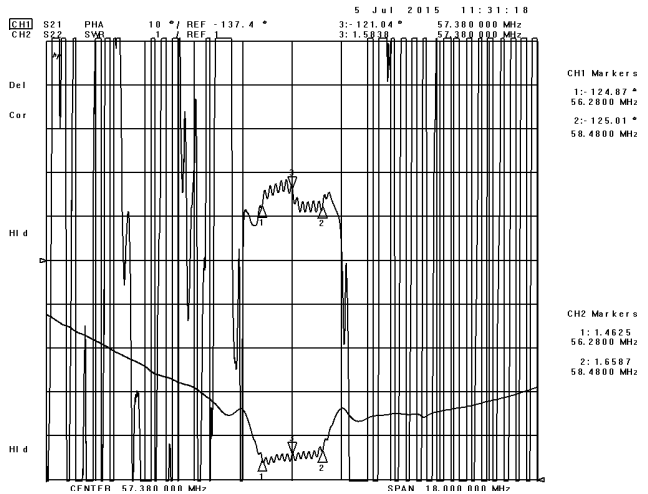

S11 Smith Chart

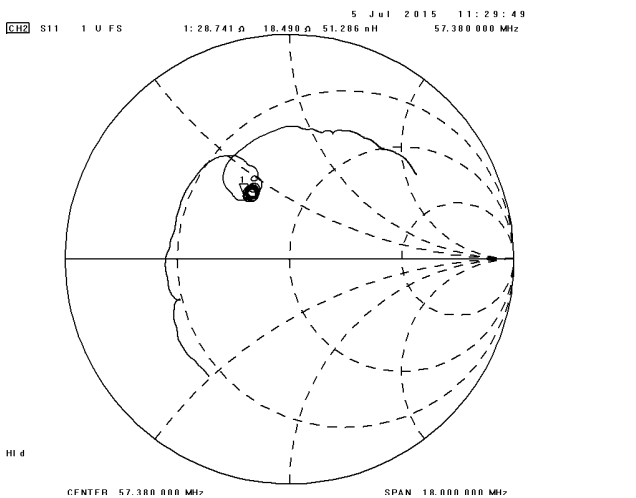

S22 Smith Chart

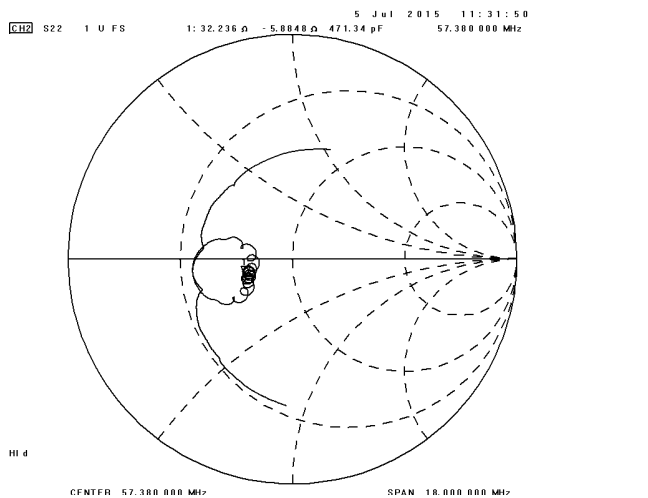

Notes

1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to **ESD protect** in the test.
2. **Static voltage** between signal load and ground may cause deterioration and destruction of the component. Please avoid static voltage.
3. **Ultrasonic cleaning** may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
4. Only leads of component may **be soldered**. Please avoid soldering another part of component.
5. There is a close relationship between the device's performance and **matching network**. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.