



APPROVAL SHEET

| Approval Specification | Customer's Approval Certificate |
|-----------------------------|---|
| TO: | Please return this copy as a certification of your approval |
| Part No.: | Checked & Approved by: |
| Customer's Part No.: | Date: |

BEIJING ZHONGXUN SIFANG SCIENCE & TECHNOLOGY CO.,LTD.

Tel: +86-010-58937383
Fax: +86-010-58937263
E-mail: bjzxsf@bjzxsf.net
Website: <http://www.bjzxsf.net>
Add: No 201, Block A. Building 3. Yongjie Beilu
Yongfeng high-tech industrial base
Haidian District Beijing city




| | | |
|----------|---|-----------|
| Part No. | : | SF1635 |
| Pages | : | 6 |
| Date | : | 2017/3/18 |
| Revision | : | 1.0 |

| | |
|---------------------|-----|
| Prepared by: | 刘菲 |
| Checked by: | 卢翠 |
| Approved by: | 高亚京 |

Application



- Low -loss SAW component
- Low amplitude ripple
- Sharp rejections at both out-bands
- Usable Passband 0.60~0.75 MHz

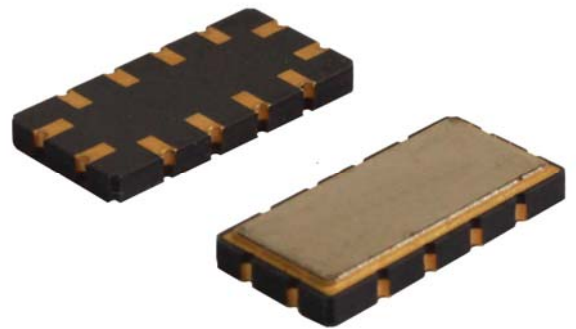

Features

- Ceramic Package for **Surface Mounted Technology (SMT)**
- **RoHS** compatible
- Package size 13.30x6.50x1.80mm³
- Package Code QCC12
- **Electrostatic Sensitive Device(ESD)**

Package Dimensions (Unit: mm)

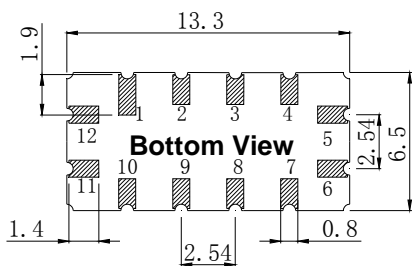

Pin Configuration


| Pin No. | Description |
|-----------------------|-------------|
| 11 | Input |
| 5 | Output |
| 1,2,3,4,6,7,8,9,10,12 | Ground |

Marking Description

| | |
|-------------|-----------------------|
| S | Trademark |
| F | SAW Filter |
| 1635 | Part Number |
| ● | Pin 1 |
| YYWW | Year Code & Week Code |

*Fig: If the products produced in 06th week of 2012, The year code & week code is 1206.

Test Circuit(Bottom View)

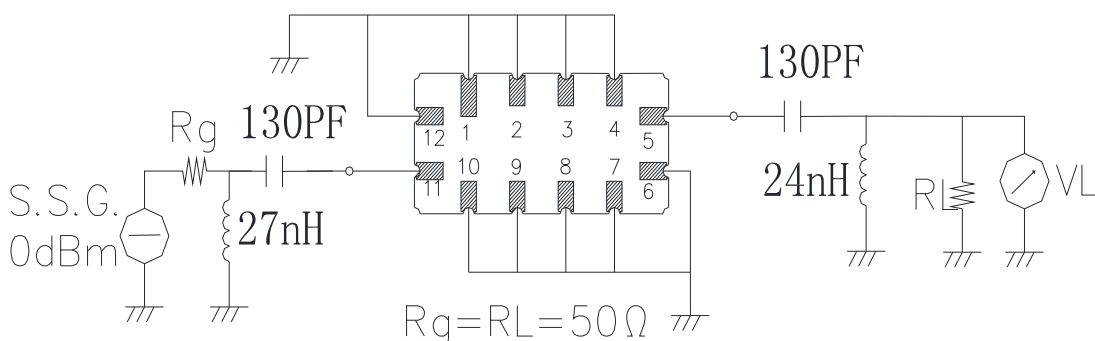

Performance**Maximum Rating**

| Item | | Value | Unit |
|-----------------------|-----------|-----------|------|
| DC Voltage | V_{DC} | 3 | V |
| Operation Temperature | T | -45 ~ +85 | °C |
| Storage Temperature | T_{stg} | -55 ~ +85 | °C |
| RF Power Dissipation | P | 10 | dBm |

Electronic Characteristics

Test Temperature: $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$


Terminating source impedance: 50Ω

Terminating load impedance: 50Ω


| Item | | Minimum | Typical | Maximum | Unit |
|------------------------|------------------------------|---------|---------|---------|------|
| Center Frequency | f_c | | 192.0 | | MHz |
| Insertion Loss(min) | IL | | 5.2 | 6.0 | dB |
| Amplitude Ripple (p-p) | Δa | | 0.3 | 1.0 | dB |
| 2dB Bandwidth | BW_{2dB} | 0.60 | 0.70 | 0.75 | MHz |
| Shape Factor | $\frac{BW_{40dB}}{BW_{3dB}}$ | | 2.4 | 3.0 | / |
| Absolute Attenuation | a | | | | |
| | 182.00MHz | 50.0 | 51.0 | | dB |
| | 190.50MHz | 35.0 | 50.0 | | dB |
| | 193.50MHz | 35.0 | 50.0 | | dB |
| | 202.00MHz | 50.0 | 51.0 | | dB |
| Input VSWR | | | 2.3:1 | 2.5:1 | / |
| Output VSWR | | | 2.1:1 | 2.5:1 | / |

Frequency Characteristics


Frequency Response

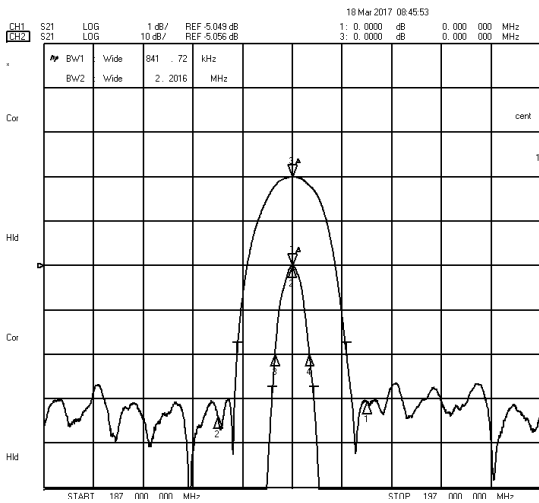


Frequency Response (wideband)

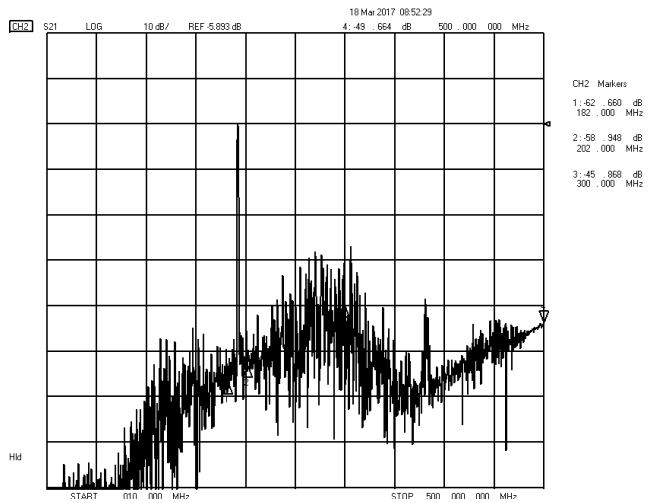


Delay Ripple & S11 VSWR

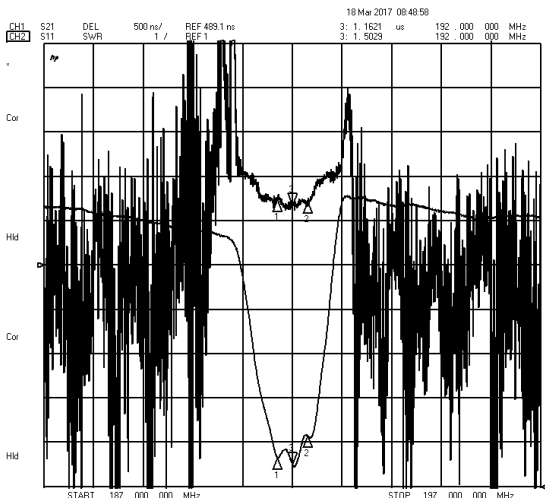


Phase Linearity & S22 VSWR

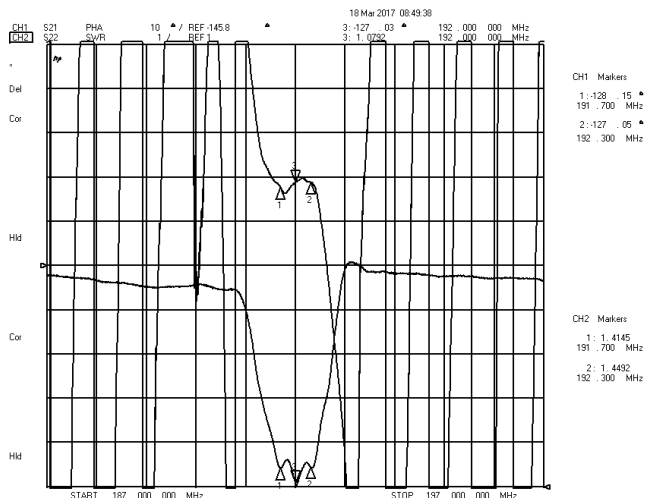

S11 Smith Chart

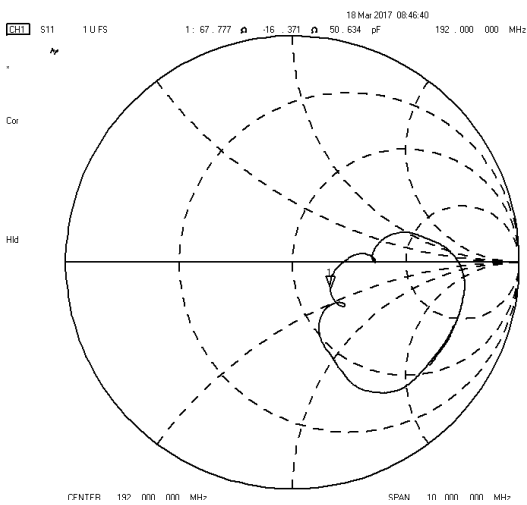

S22 Smith Chart

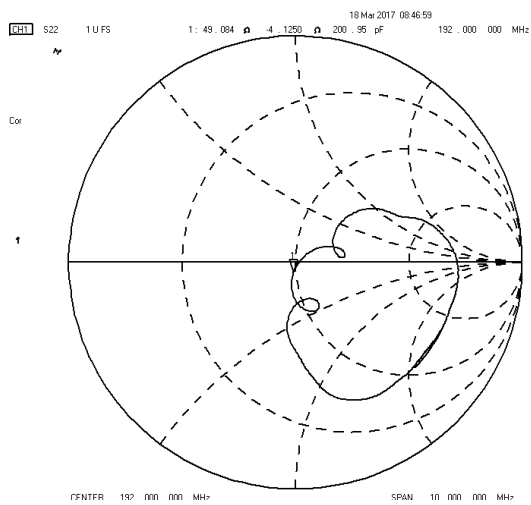

Notes

1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to **ESD protect** in the test.
2. **Static voltage** between signal load and ground may cause deterioration and destruction of the component. Please avoid static voltage.
3. **Ultrasonic cleaning** may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
4. Only leads of component may **be soldered**. Please avoid soldering another part of component.
5. There is a close relationship between the device's performance and **matching network**. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.