



APPROVAL SHEET

| Approval Specification | Customer's Approval Certificate |
|--|---|
| <p>TO:</p> <p>Part No.:</p> <p>Customer's Part No.:</p> | <p>Please return this copy as a certification of your approval</p> <p>Checked & Approved by:</p> <p>Date:</p> |

BEIJING ZHONGXUN SIFANG SCIENCE & TECHNOLOGY CO.,LTD.

Tel: +86-010-62968745
 Fax: +86-010-62973654
 E-mail: bjzxsf@bjzxsf.net
 Website: <http://www.bjzxsf.net>
 Add: NO.7 NieGeZhuang Rd,SuJiaTuo Town,
 HaiDian District,Beijing,P.R.China



| | | |
|----------|---|----------|
| Part No. | : | SF0281 |
| Pages | : | 6 |
| Date | : | 2013/2/2 |
| Revision | : | 1.0 |


| | |
|---------------------|--|
| Prepared by: | |
| Checked by: | |
| Approved by: | |

Application


- Low Shape Factor
- Low amplitude ripple
- Sharp rejections at both out-bands
- Usable passband 12 MHz

Features

- RoHS compatible
- Package size 34.8x12.6x5.50mm³
- Package Code DIP3512J
- Electrostatic Sensitive Device(ESD)

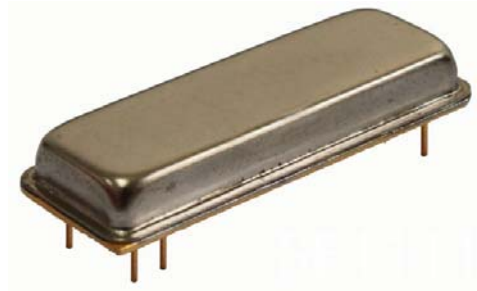

Package Dimensions (Unit: mm)

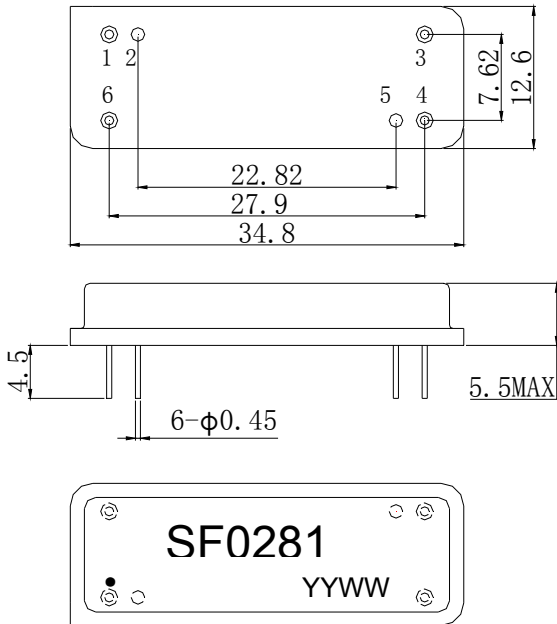

Pin Configuration


| Pin No. | Description |
|---------|-------------|
| 6 | Input |
| 4 | Output |
| 1,2,3,5 | Ground |

Marking Description

| | |
|-------------|-----------------------|
| S | Trademark |
| F | SAW Filter |
| 0281 | Part Number |
| ● | Pin 1 |
| YYWW | Year Code & Week Code |

*Fig: If the products produced in 06th week of 2012, The year code & week code is 1206.

Test Circuit

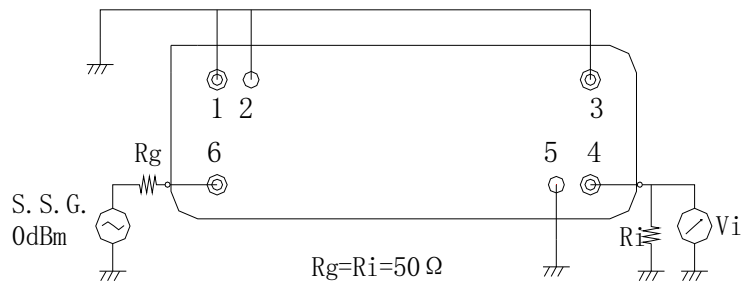

Performance**Maximum Rating**

| Item | | Value | Unit |
|-----------------------|------------------|------------|------|
| DC Voltage | V _{DC} | 3 | V |
| Operation Temperature | T | -40 ~ +85 | °C |
| Storage Temperature | T _{stg} | -55 ~ +125 | °C |
| RF Power Dissipation | P | 10 | dBm |

Electronic Characteristics

Test Temperature: 25°C ± 2°C


Terminating source impedance: 50Ω

Terminating load impedance: 50Ω


| Item | | Minimum | Typical | Maximum | Unit |
|------------------------|-----------------------|---------|---------|---------|------|
| Center Frequency | f _c | 89.90 | 90.00 | 90.10 | MHz |
| Insertion Loss(min) | IL | | 26.0 | 29.0 | dB |
| Amplitude Ripple (p-p) | 84.00-96.00 MHz Δα | | 0.8 | 1.0 | dB |
| 1 dB Bandwidth | BW _{2dB} | 12.00 | 12.30 | | MHz |
| 3 dB Bandwidth | BW _{3dB} | 12.50 | 12.60 | | MHz |
| 35 dB Bandwidth | BW _{35dB} | | 13.30 | 13.35 | MHz |
| 40 dB Bandwidth | BW _{40dB} | | 13.35 | 13.40 | MHz |
| 45 dB Bandwidth | BW _{45dB} | | 13.42 | 13.45 | MHz |
| 50 dB Bandwidth | BW _{50dB} | | 13.45 | 13.48 | MHz |
| 55 dB Bandwidth | BW _{55dB} | | 13.48 | 13.50 | MHz |
| Absolute Delay | | | 3.6 | 3.8 | us |
| Absolute Attenuation | α | | | | |
| | 50.00 -82.00 MHz | 50.0 | 55.0 | | dB |
| | 75.00 MHz | 55.0 | 60.0 | | dB |
| | 105.00 MHz | 55.0 | 60.0 | | dB |
| | 98.00-150.00 MHz | 50.0 | 55.0 | | dB |

Frequency Characteristics


Frequency Response

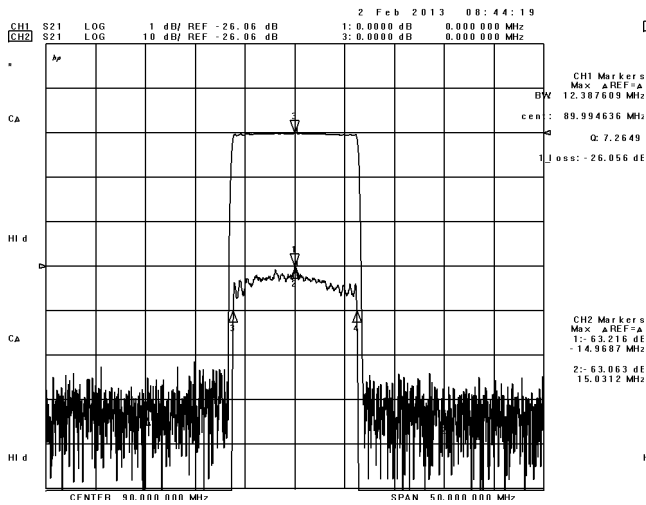


Frequency Response (wideband)

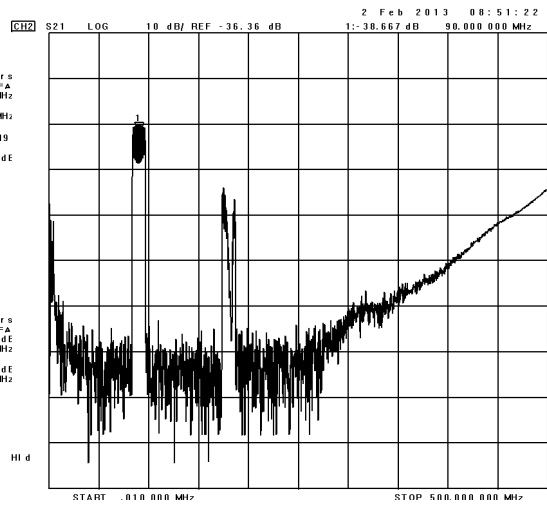


Delay Ripple & S11 VSWR

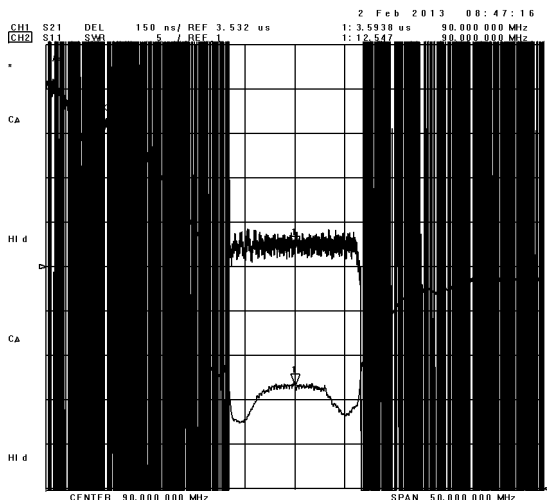


Phase Linearity & S22 VSWR

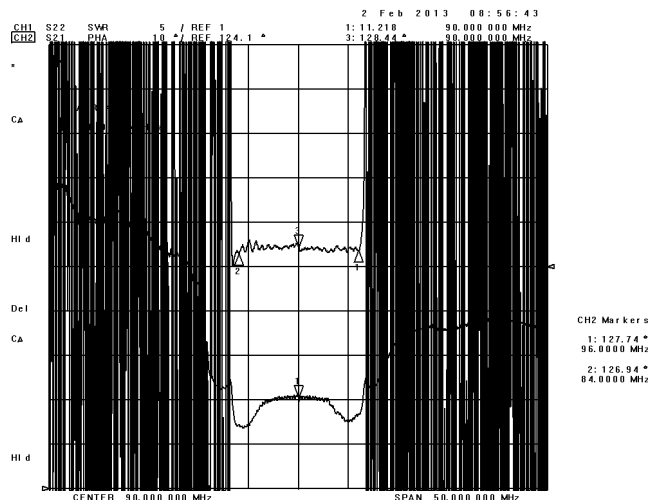

S11 Smith Chart

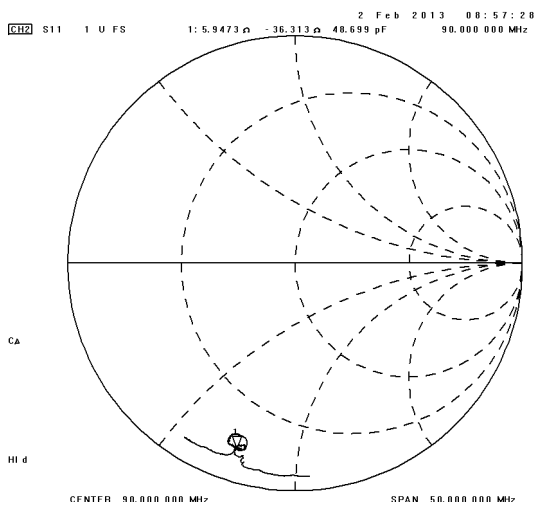

S22 Smith Chart

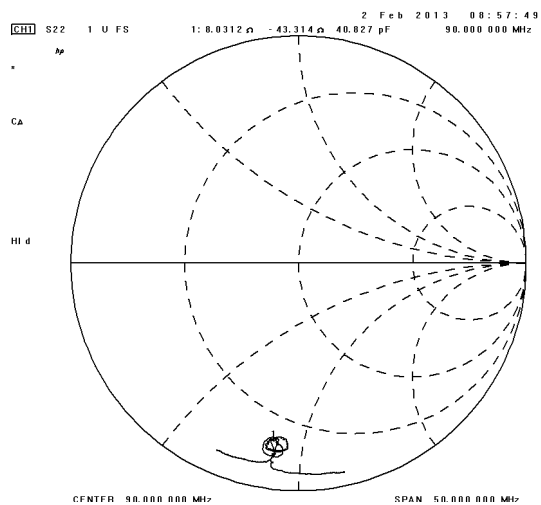

Notes

1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to **ESD protect** in the test.
2. **Static voltage** between signal load and ground may cause deterioration and destruction of the component. Please avoid static voltage.
3. **Ultrasonic cleaning** may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
4. Only leads of component may **be soldered**. Please avoid soldering another part of component.
5. There is a close relationship between the device's performance and **matching network**. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.