



# APPROVAL SHEET

| Approval Specification  | Customer's Approval Certificate  |
|---|--|
| <b>TO:</b><br><br><b>Part No.:</b><br><br><b>Customer's Part No.:</b> | Please return this copy as a certification of your approval<br><br><b>Checked &amp; Approved by:</b><br><br><b>Date:</b> |

## BEIJING ZHONGXUN SIFANG SCIENCE & TECHNOLOGY CO.,LTD.

Tel: +86-010-58937383  
 Fax: +86-010-58937263  
 E-mail: [bjzxsf@bjzxsf.net](mailto:bjzxsf@bjzxsf.net)  
 Website: <http://www.bjzxsf.net>  
 Add: No 201, Block A. Building 3. Yongjie Beilu  
 Yongfeng high-tech industrial base  
 Haidian District Beijing city



|          |   |          |
|----------|---|----------|
| Part No. | : | SF0605   |
| Pages    | : | 6        |
| Date     | : | 2015/7/6 |
| Revision | : | 1.0      |

|                     |    |
|---------------------|----|
| <b>Prepared by:</b> | 梁浩 |
| <b>Checked by:</b>  |    |
| <b>Approved by:</b> |    |


**Application**

- Low-loss SAW component
- Low amplitude ripple
- Sharp rejections at both out-bands
- Passband 2.2 MHz

**Features**

- Ceramic Package for **Surface Mounted Technology (SMT)**
- **RoHS** compatible
- Package size 19.00x6.50x1.75mm<sup>3</sup>
- Package Code SMD19
  
- **Electrostatic Sensitive Device(ESD)**

**Package Dimensions (Unit: mm)**

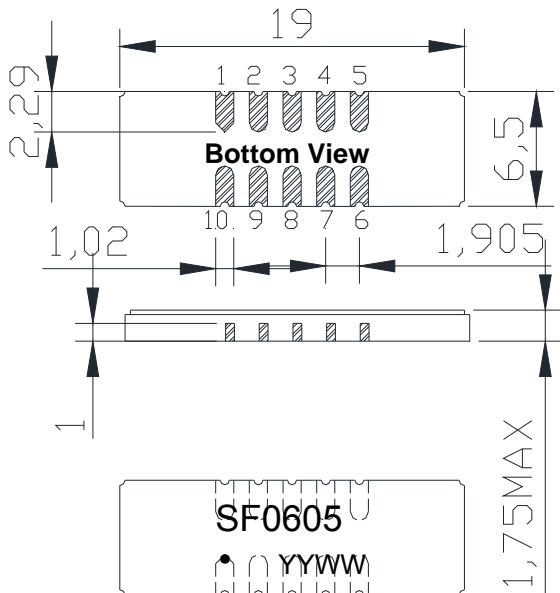


**Pin Configuration**

| Pin No.         | Description |
|-----------------|-------------|
| 10              | Input       |
| 5               | Output      |
| 1,2,3,4,6,7,8,9 | Ground      |

**Marking Description**

|             |                       |
|-------------|-----------------------|
| <b>S</b>    | Trademark             |
| <b>F</b>    | SAW Filter            |
| <b>0605</b> | Part Number           |
| ●           | Pin 1                 |
| YYWW        | Year Code & Week Code |

**Test Circuit(Bottom View)**

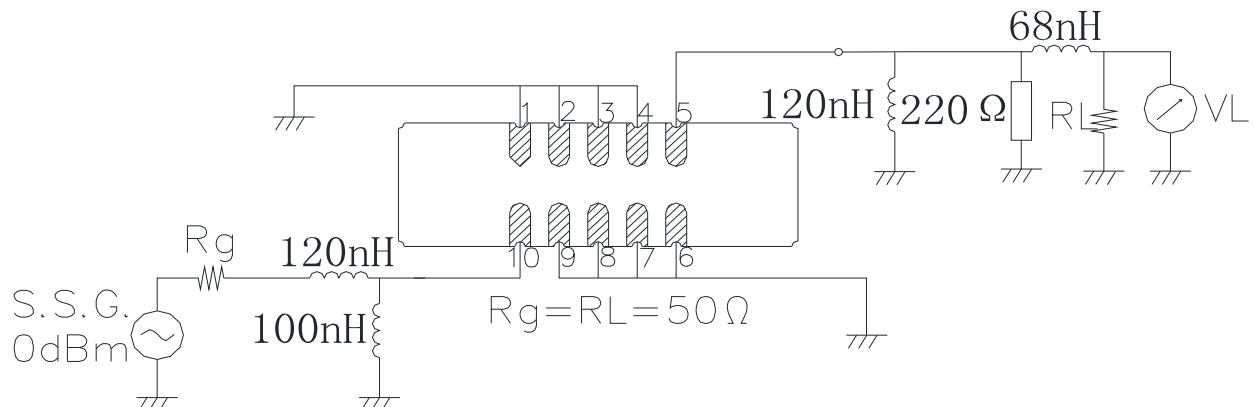

\*Fig: If the products produced in 06<sup>th</sup> week of 2012, The year code & week code is 1206.

**Performance****Maximum Rating**

| Item                  |                  | Value      | Unit |
|-----------------------|------------------|------------|------|
| DC Voltage            | V <sub>DC</sub>  | 3          | V    |
| Operation Temperature | T                | -40 ~ +85  | °C   |
| Storage Temperature   | T <sub>stg</sub> | -55 ~ +125 | °C   |
| RF Power Dissipation  | P                | 10         | dBm  |

**Electronic Characteristics**

Test Temperature: 25°C ± 2°C


Terminating source impedance: 50Ω

Terminating load impedance: 50Ω


| Item                                    |                   | Minimum | Typical | Maximum | Unit |
|---|-------------------|---------|---------|---------|------|
| Center Frequency                        | f <sub>c</sub>    |         | 64.41   |         | MHz  |
| Insertion Loss(Fc)                      | IL                |         | 14.0    | 16.0    | dB   |
| 1 dB Bandwidth(Relative to Fc)          | BW <sub>1dB</sub> | 2.20    | 2.21    | 2.40    | MHz  |
| Absolute Attenuation(With a base of Fc) | α                 |         |         |         |      |
|   | 62.51MHz          | 46.5    | 62.0    |         | dB   |
|   | 66.31MHz          | 46.5    | 62.0    |         | dB   |
|   | 54.41-62.51MHz    | 45.0    | 47.0    |         | dB   |
|   | 66.31-74.41MHz    | 45.0    | 48.0    |         | dB   |
|   | 85.00-700.00MHz   | 25.0    | 30.0    |         | dB   |
| Phase Linearity                         | 63.31-65.51MHz    |         | 9.0     | 10.0    | deg  |
| Input VSWR                              | 64.41MHz          |         | 1.9:1   | 2.5:1   | /    |
| Output VSWR                             | 64.41MHz          |         | 1.5:1   | 2.0:1   | /    |

Frequency Characteristics


Frequency Response

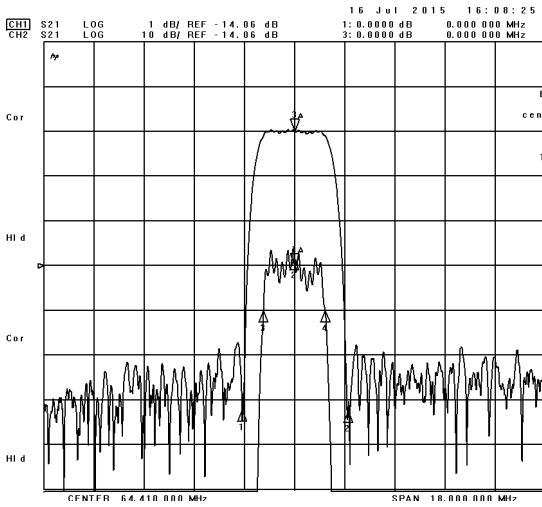


Frequency Response (wideband)

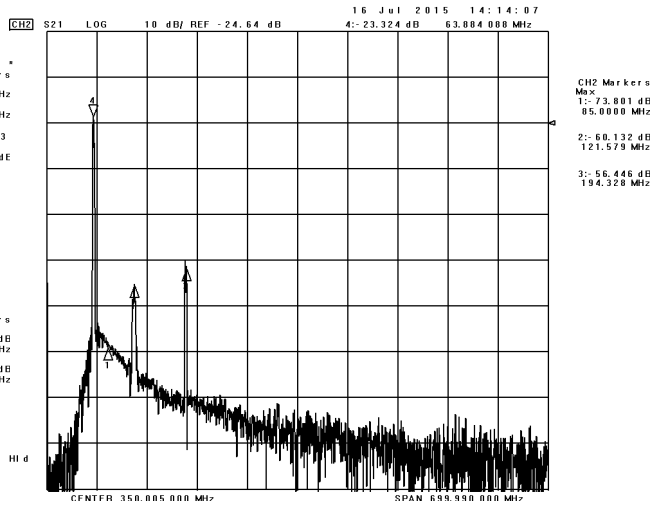


Delay Ripple & S11 VSWR

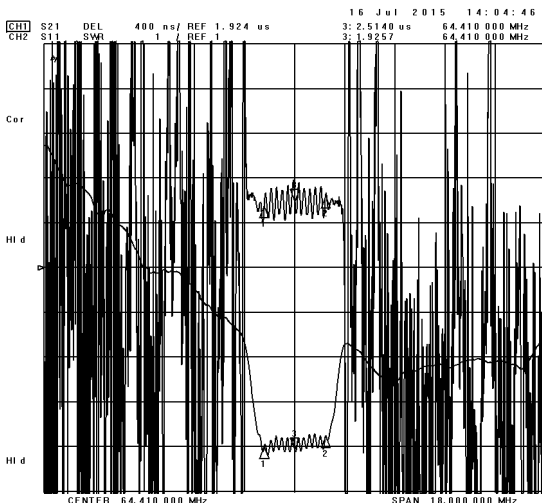


Phase Linearity & S22 VSWR

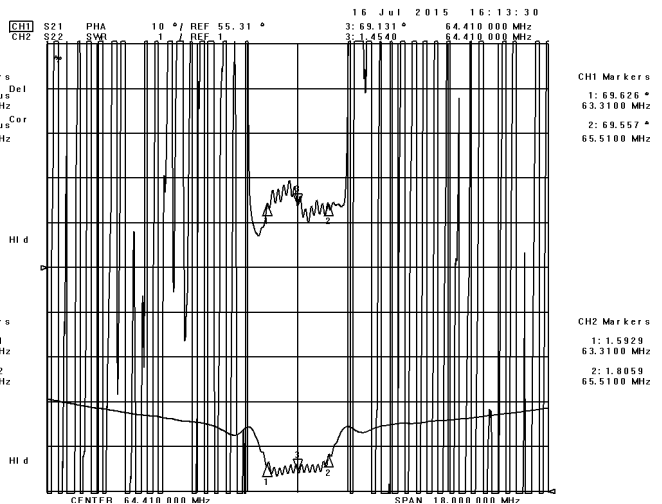

S11 Smith Chart

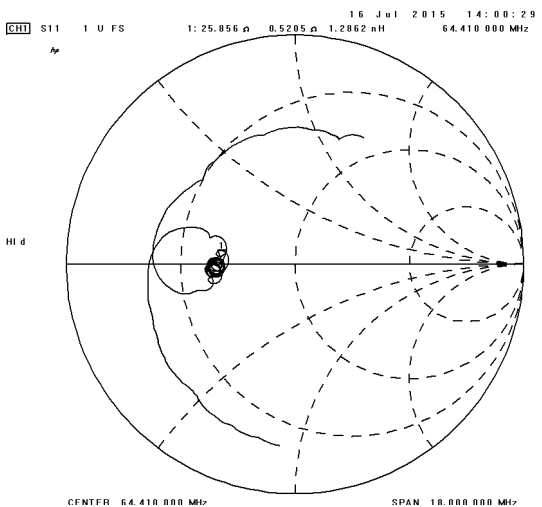


S22 Smith Chart

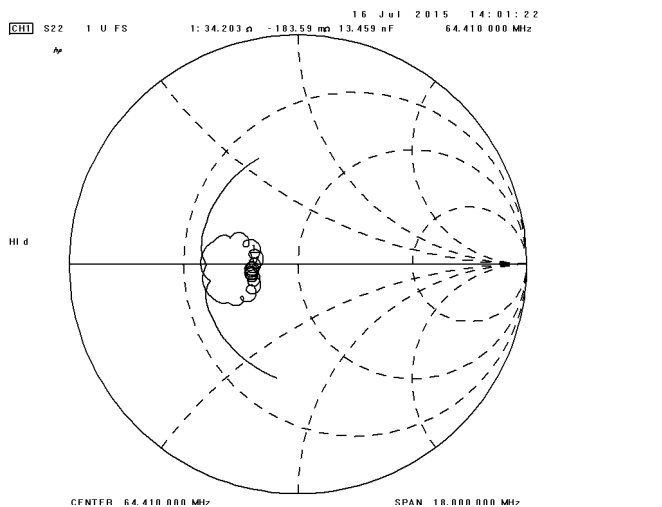

**Reliability (The SAW components shall remain electrical performance after tests)**

| No. | Test item                    | Test condition   |
|-----|------------------------------|--|
| 1   | Temperature Storage          | (1) Temperature: 85°C±2°C , Duration: 250h , Recovery time: 2h±0.5h<br>(2) Temperature: -55°C±3°C , Duration: 250h ,Recovery time: 2h±0.5h                             |
| 2   | Humidity Test                | Conditions: 60°C±2°C , 90~95% RH Duration: 250h  |
| 3   | Thermal Shock                | Heat cycle conditions: TA=-55°C±3°C, TB=85°C±2°C, t1=t2=30min, Switch time: ≤3min, Cycle time: 100 times, Recovery time: 2h±0.5h.                                      |
| 4   | Vibration Fatigue            | Frequency of vibration: 10~55Hz Amplitude:1.5mm<br>Directions: X,Y and Z Duration: 2h  |
| 5   | Drop Test                    | Cycle time: 10 times Height: 1.0m  |
| 6   | Solder Ability Test          | Temperature: 245°C±5°C Duration: 3.0s--5.0s<br>Depth: DIP--2/3 , SMD--1/5  |
| 7   | Resistance to Soldering Heat | (1)Thickness of PCB:1mm , Solder condition: 260°C±5°C , Duration: 10±1s<br>(2)Temperature of Soldering Iron: 350°C±10°C , Duration: 3~4s ,<br>Recovery time : 2 ± 0.5h |

**Recommended Reflow Soldering Diagram**

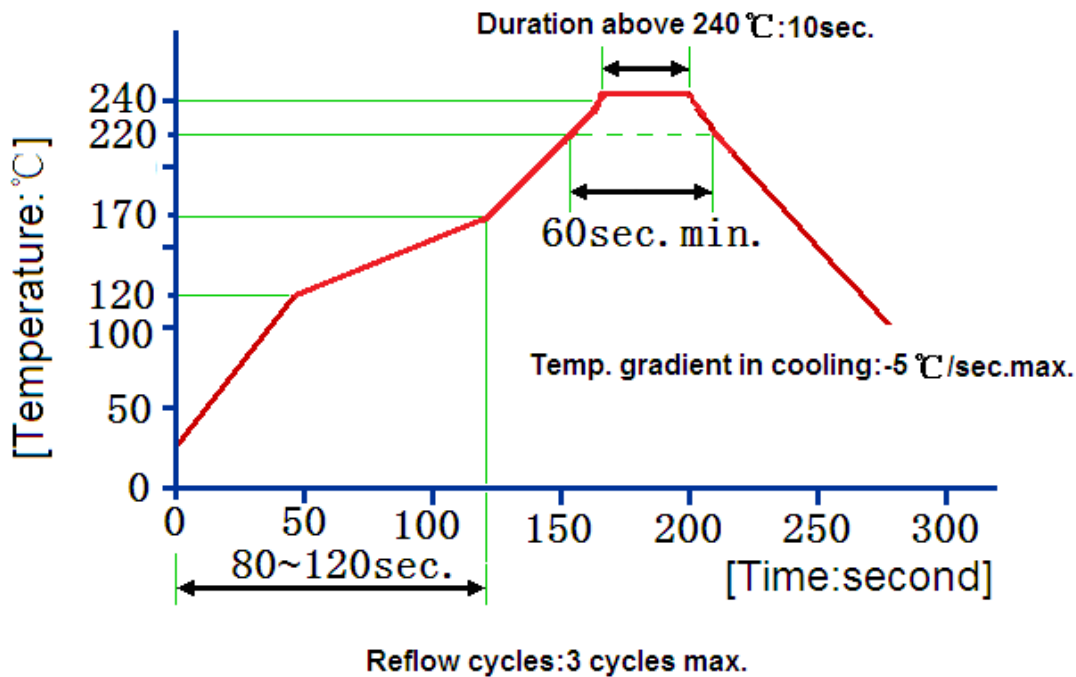

**Notes**

1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to **ESD protect** in the test.
2. **Static voltage** between signal load and ground may cause deterioration and destruction of the component. Please avoid static voltage.
3. **Ultrasonic cleaning** may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
4. Only leads of component may **be soldered**. Please avoid soldering another part of component.
5. There is a close relationship between the device's performance and **matching network**. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.