



# APPROVAL SHEET

Approval Specification	Customer's Approval Certificate
<b>TO:</b>	Please return this copy as a certification of your approval
<b>Part No.:</b>	<b>Checked &amp; Approved by:</b>
<b>Customer's Part No.:</b>	<b>Date:</b>

## BEIJING ZHONGXUN SIFANG SCIENCE & TECHNOLOGY CO.,LTD.

Tel: +86-010-58937383  
Fax: +86-010-58937263  
E-mail: [bjzxsf@bjzxsf.net](mailto:bjzxsf@bjzxsf.net)  
Website: <http://www.bjzxsf.net>  
Add: No 201, Block A. Building 3. Yongjie Beilu  
Yongfeng high-tech industrial base  
Haidian District Beijing city



Part No.	:	SF1628
Pages	:	6
Date	:	2017/3/30
Revision	:	1.0

<b>Prepared by:</b>	刘菲
<b>Checked by:</b>	卢翠
<b>Approved by:</b>	高亚京


**Application**

- Low -loss SAW component
- Low amplitude ripple
- Sharp rejections at both out-bands
- Usable Passband 100 KHz

**Features**

- Ceramic Package for **Surface Mounted Technology (SMT)**
- **RoHS** compatible
- Package size 24.65x9.00x2.25mm<sup>3</sup>
- Package Code SMD24
- **Electrostatic Sensitive Device(ESD)**

**Package Dimensions (Unit: mm)**

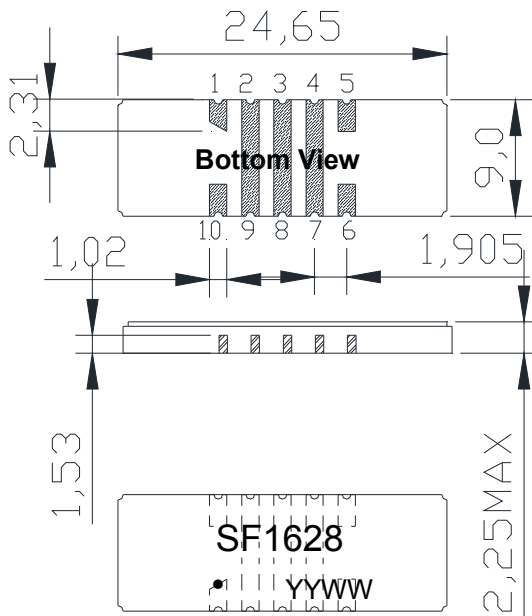

**Pin Configuration**


Pin No.	Description
10	Input
5	Output
1,2,3,4,6,7,8,9	Ground

**Marking Description**

<b>S</b>	Trademark
<b>F</b>	SAW Filter
<b>1628</b>	Part Number
●	Pin 1
<b>YYWW</b>	Year Code & Week Code

\*Fig: If the products produced in 06<sup>th</sup> week of 2012, The year code & week code is 1206.

**Test Circuit(Bottom View)**

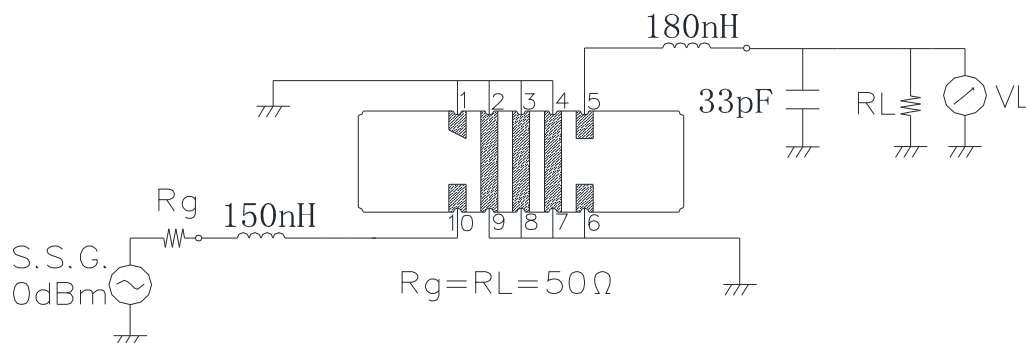

**Performance****Maximum Rating**

Item		Value	Unit
DC Voltage	V <sub>DC</sub>	3	V
Operation Temperature	T	-20 ~ +70	°C
Storage Temperature	T <sub>stg</sub>	-55 ~ +125	°C
RF Power Dissipation	P	10	dBm

**Electronic Characteristics**

Test Temperature: 25°C ± 2°C


Terminating source impedance: 50Ω

Terminating load impedance: 50Ω


Item		Minimum	Typical	Maximum	Unit
Center Frequency	f <sub>c</sub>		161.8375		MHz
Insertion Loss(min)	IL		6.0	10.0	dB
3dB Bandwidth	BW <sub>3dB</sub>	0.10	0.14		MHz
40 dB Bandwidth	BW <sub>40dB</sub>		0.37	0.50	MHz
Absolute Delay @F <sub>c</sub>	AD		6.27		us
Group Delay Ripple 161.7875-161.8875MHz	GDR		6.40	6.50	us
Absolute Attenuation	α				
	161.4375MHz	40.0	65.0		dB
	162.2375MHz	40.0	60.0		dB

### Frequency Characteristics


#### Frequency Response

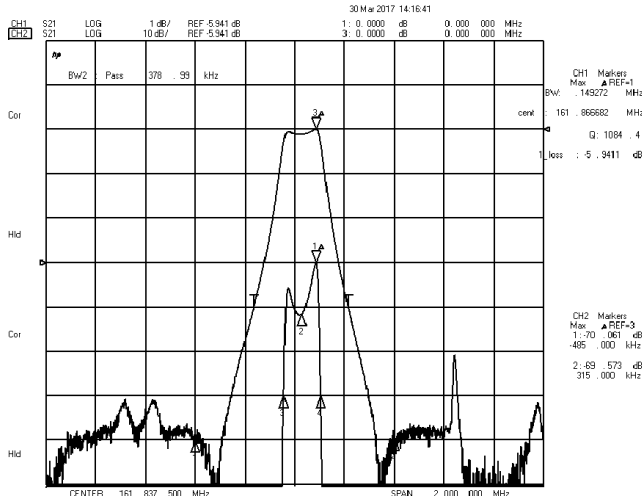


#### Frequency Response (wideband)

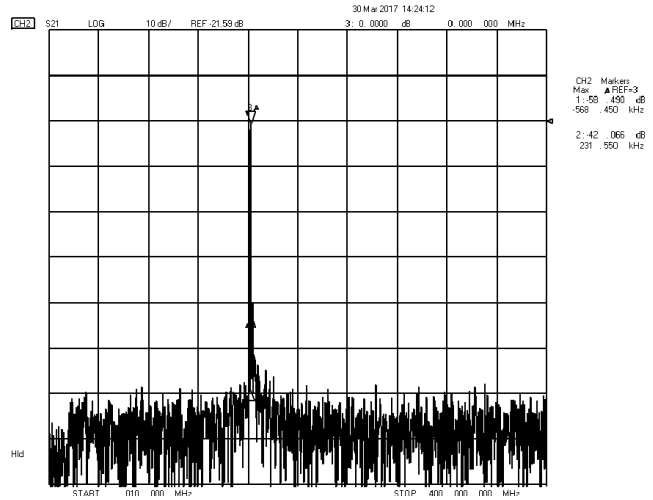


#### Delay Ripple & S11 VSWR

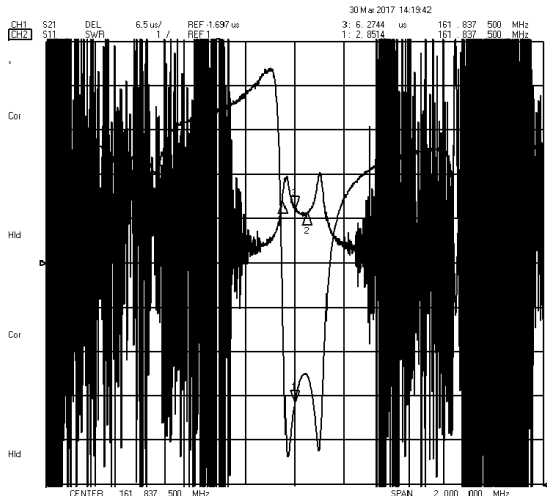


#### Phase Linearity & S22 VSWR

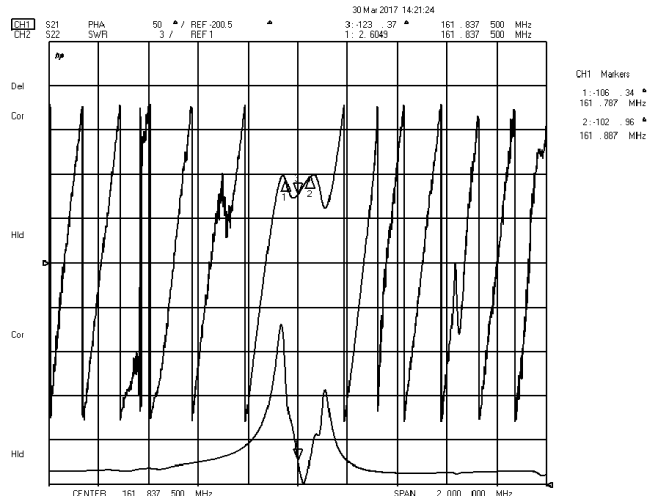

#### S11 Smith Chart

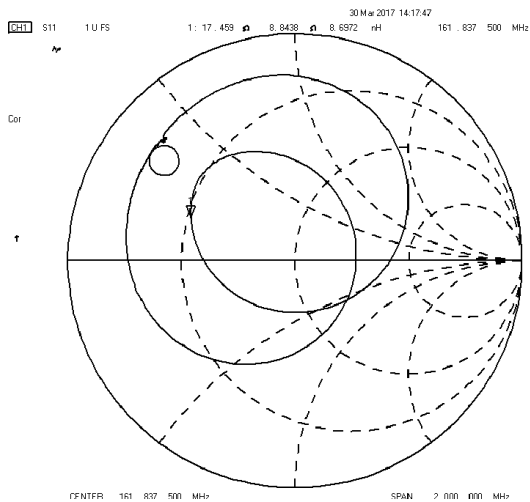

#### S22 Smith Chart

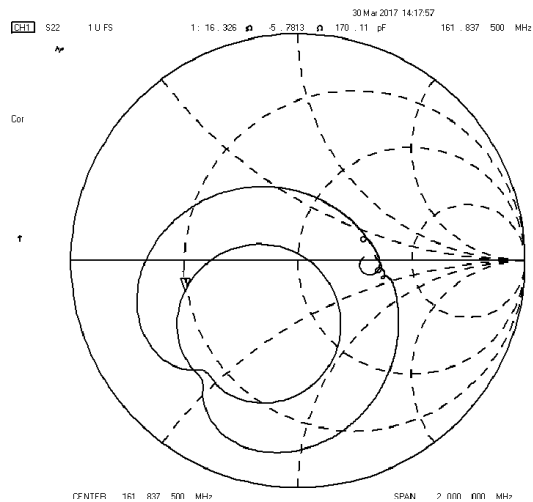



**Notes**

1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to **ESD protect** in the test.
2. **Static voltage** between signal load and ground may cause deterioration and destruction of the component. Please avoid static voltage.
3. **Ultrasonic cleaning** may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
4. Only leads of component may **be soldered**. Please avoid soldering another part of component.
5. There is a close relationship between the device's performance and **matching network**. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.